

STEALTH

LOCKING

STEALTH02DS



SLIM MONITORED MAGLOCK WITH DOOR STATUS MONITORING


The compact design of this magnetic lock makes it ideal for most indoor applications where 275kg holding force is sufficient. This model includes door status monitoring contacts to monitor the door position (open or closed).

FEATURES

- ♦ MOV provides spike and surge protection
- ♦ Fail-safe operation (power to lock)
- ♦ Anti-residual magnetism protection
- ♦ Top-plate, armature-plate and fixings included
- ♦ Slim design, Surface mount
- ♦ Dual voltage 12Vdc or 24Vdc (selectable)
- ♦ Stealth black finish
- ♦ Lock monitoring
- ♦ Door status monitoring
- ♦ Fire rated

TECHNICAL INFORMATION

- ♦ Holding force: up to 275kg (600lb)
- ♦ Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- ♦ Voltage tolerance: +/- 15%
- ♦ Operating temp: -10°C to +55°C
- ♦ Humidity: 0-95% non condensating
- ♦ Weight: 2kg approx.
- ♦ Red/Green LED indicator
- ♦ Relay: COM/NO/NC (1A@24Vdc)
- ♦ Reed switch door contact

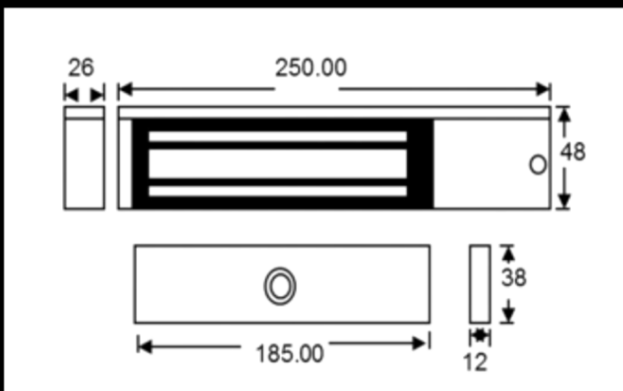

SALES@STEALTHLOCKING.CO.UK