

STEALTH

LOCKING

STEALTH04DS



SLIM UNMONITORED DOUBLE MAGLOCK WITH DOOR STATUS MONITORING


The locks compact design makes it ideal for most indoor applications where 275kg holding force is sufficient. This model includes door status monitoring contacts to monitor each door position (open or closed).

FEATURES

- ♦ MOV provides spike and surge protection
- ♦ Fail-safe operation (power to lock)
- ♦ Anti-residual magnetism protection
- ♦ Top-plate, armature-plate and fixings included
- ♦ Slim design
- ♦ Dual voltage 12Vdc or 24Vdc (selectable)
- ♦ Surface mount
- ♦ Stealth black finish
- ♦ Fire rated
- ♦ Door status monitoring

TECHNICAL INFORMATION

- ♦ Holding force: up to 275kg (600lb)
- ♦ Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- ♦ Voltage tolerance: +/- 15%
- ♦ Operating temp: -10°C to +55°C
- ♦ Humidity: 0-95% non condensating
- ♦ Weight: 4kg approx.
- ♦ Reed switch door contact (one per side)

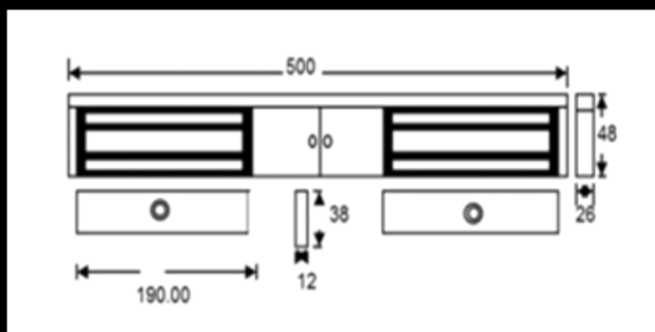

sales@stealthlocking.co.uk