

# STEALTH

---

## LOCKING

### STEALTH20



### STANDARD MONITORED MAGLOCK 12/24VDC


Standard single monitored magnetic lock designed for indoor applications where 545kg holding force is required. Monitoring provides LED lock status indication and relay contacts for signalling.

#### FEATURES

- ♦ Lock monitoring
- ♦ Dual voltage
- ♦ Surface mount
- ♦ Stealth black finish
- ♦ Fire rated

#### TECHNICAL INFORMATION

- ♦ Holding force: up to 545kg (1200lb)
- ♦ Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- ♦ Voltage tolerance: +/- 15%
- ♦ Operating temp: -10°C to +55°C
- ♦ Humidity: 0-95% non condensating
- ♦ Weight: 4.8kg approx.
- ♦ Red/Green LED indicator
- ♦ Relay: COM/NO/NC (1A@24Vdc)

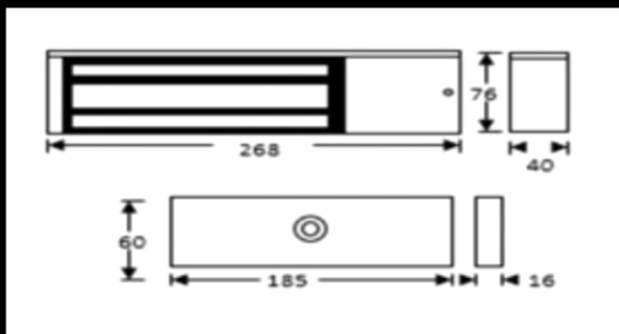

[SALES@STEALTHLOCKING.CO.UK](mailto:SALES@STEALTHLOCKING.CO.UK)