

# STEALTH

---

## LOCKING

### STEALTH40



### STANDARD DOUBLE MAGLOCK MONITORED 12/24VDC


Standard monitored double magnetic lock designed for indoor applications where 545kg holding force is required. Monitoring provides LED lock status indication and relay contacts for signalling.

#### FEATURES

- ♦ MOV provides spike and surge protection
- ♦ Fail-safe operation (power to lock)
- ♦ Anti-residual magnetism protection
- ♦ Top-plate, armature-plate and fixings included
- ♦ Dual voltage 12Vdc or 24Vdc (selectable)
- ♦ Surface mount
- ♦ Stealth black finish
- ♦ Lock monitoring
- ♦ Fire rated

#### TECHNICAL INFORMATION

- ♦ Holding force: up to 545kg (1200lb) per side
- ♦ Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- ♦ Voltage tolerance: +/- 15%
- ♦ Operating temp: -10°C to +55°C
- ♦ Humidity: 0-95% non condensating
- ♦ Weight: 9.6kg approx.
- ♦ Relay: COM/NO/NC (1A@ 24Vdc) (one per side)
- ♦

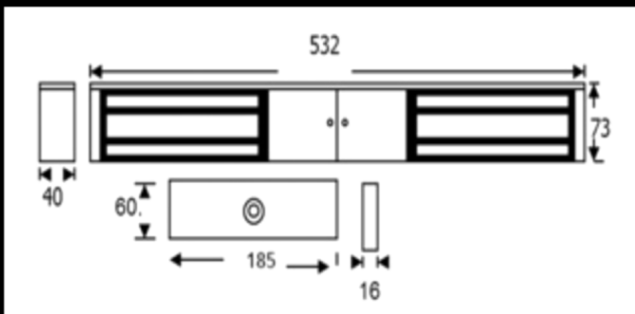

[SALES@STEALTHLOCKING.CO.UK](mailto:SALES@STEALTHLOCKING.CO.UK)