

STP-G10040DS



DOUBLE STANDARD MAGLOCK SURFACE MONITORED WITH DS MONITORING


This lock is designed for indoor applications where 545kg holding force is required. LED lock status indication and relay contacts for signalling. This model includes door status monitoring contacts to monitor the door position.

FEATURES

- Double standard maglock surface monitored with DS monitoring

TECHNICAL INFORMATION

- This lock is designed for indoor applications where 545kg holding force is required.
- LED lock status indication and relay contacts for signalling.
- This model includes door status monitoring contacts to monitor the door position.

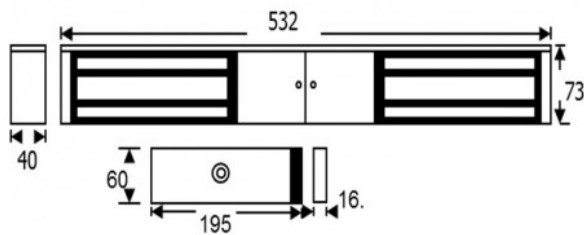

RELATED PRODUCTS



STP- DU01-KGG200SG



STP-EM500CL



STP-EM520S



STP-G10060DS