


STP-GS200M

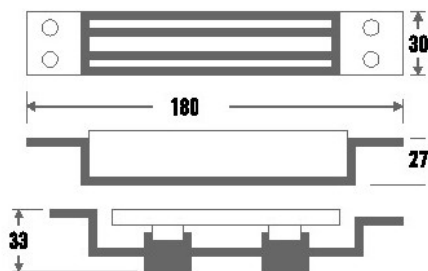

MONITORED MICRO SHEARLOCK

This monitored micro shearlock is recommended for use on doors where a concealed lock is required. Ideal for double action swing doors (i.e. swings in both directions) or for sliding doors. Suitable for horizontal or vertical installation.

FEATURES

- Lock monitored
- Mortice fitting
- Aluminium
- Up to 540kg holding force
- Horizontal or vertical installation

TECHNICAL INFORMATION

- Voltage 12Vdc or 24Vdc (+/-10%)
- Current Draw: 420mA @ 12Vdc; 210mA @ 24Vdc
- Lock monitoring contact (SPDT), rated: 1A @ 24Vdc
- Dimensions:
 - Lock = 180mm (L) x 30mm (W) x 27mm (D)
 - Armature plate = 180mm (L) x 30mm (W) x 33mm (D)
- Holding Force: Up to 545kg (1200lbs) in shear
- Weight : 1.2 kg approx.

RELATED PRODUCTS



STP-GS200



STP-GS200GH



STP-GS200H



STP-VCKPK