
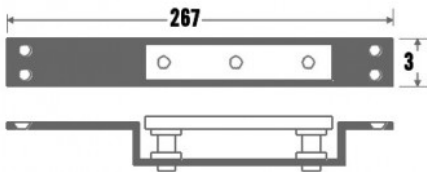


STP-SL705-35

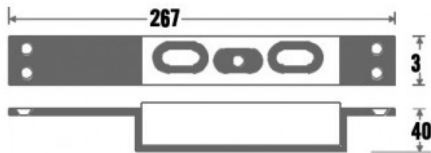

35MM WIDE MONITORED SHEARLOCK ADJUSTABLE LOCKING PIN

This monitored shearlock is recommended for use on doors where a concealed lock is required. Ideal for double action swing doors (i.e. swings in both directions) or for sliding doors. Suitable for horizontal or vertical installation.

FEATURES

- Mortice fitting
- Suitable for double swing doors, or sliding doors
- Horizontal or vertical installation.
- Lock monitoring (magnetic bond sensor)
- Anti-residual magnetism design
- Locking time delay: 1-6 seconds (adjustable)

TECHNICAL INFORMATION

- Voltage 12-24Vdc (auto-selectable)
- Current Draw:
 - Pull-in current: 1.9A @ 12 Vdc; 1.2A @ 24 Vdc
 - Holding current: 550mA @ 12 Vdc; 350mA @ 24 Vdc
- Lock monitoring contact (SPDT), rated: 1A @ 30 Vdc
- Holding Force: Up to 1000kg (2200 lbs) in shear
- Permissible gap between lock and armature plate = 3mm max.
- Weight : 2.2 kg approx.

RELATED PRODUCTS



STP-GS200M



STP-SL183



STP-SL705-30